




TILOS SOFT SEATING




TI10N
L: 850
P: 640
HS: 420

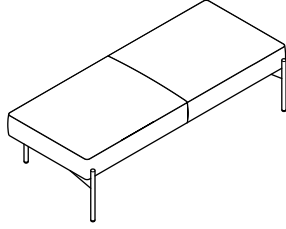


TI20N
L: 1480
P: 640
HS: 420




TI1PN
L: 850
P: 780
HT: 810
HS: 420

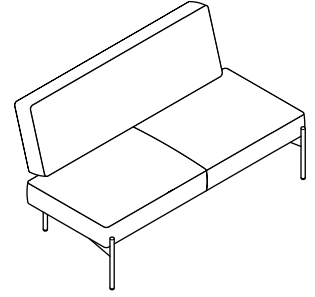


TI2PN
L: 1480
P: 780
HT: 810
HS: 420




TI1DN
L: 930
P: 830
HT: 810
HS: 420
HB: 610

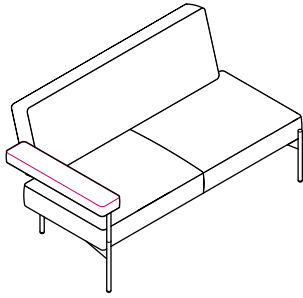


TI2DN
L: 1560
P: 830
HT: 810
HS: 420
HB: 610




TI1SN
L: 930
P: 830
HT: 810
HS: 420
HB: 610



TI2SN
L: 1560
P: 830
HT: 810
HS: 420
HB: 610




TI1BN
L: 1010
P: 830
HT: 810
HS: 420
HB: 610

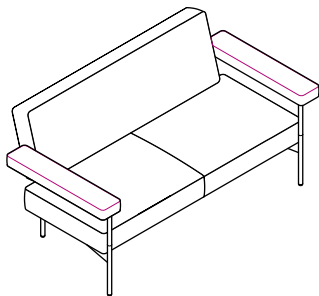


TI2BN
L: 1640
P: 830
HT: 810
HS: 420
HB: 610

ESEMPI DI CONFIGURAZIONE
SET UP EXAMPLES

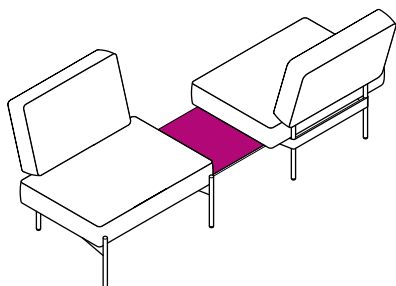


TI1PN+TALGN+TI1PN

L: 2050
P: 780
HT: 810
HS: 420

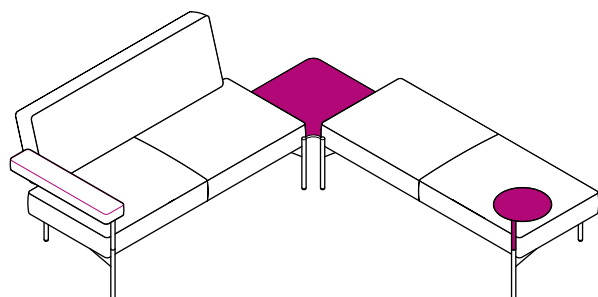

TI2DN+TAAGN+TI2ON+TATGN

L: 2340
P: 2270
HT: 810
HS: 420
HB: 610
Ø: 320

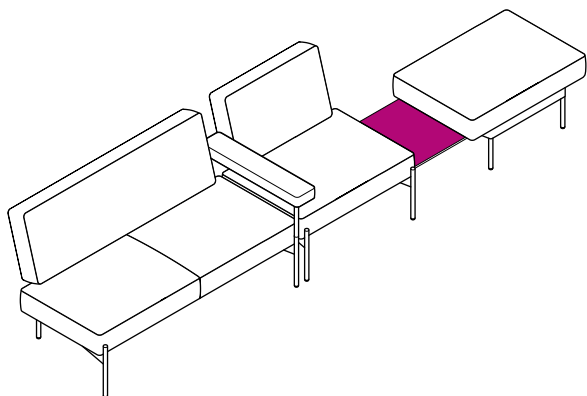

TI2SN+TI1PN+TALGN+TI1ON


L: 3480
P: 920
HT: 810
HS: 420
HB: 610

ACCESSORI
ACCESSORIES




TATGN

Ø: 320
HT: 635



TALGN

L: 350
P: 485
HT: 260



TAAGN

L: 590
P: 590
HT: 260

DISPONIBILE SU RICHIESTA
AVAILABLE ON DEMAND

Modulo cablato compatto con presa output tipo F/schuko, cavo di alimentazione 2m

Compact powerdock with output type F/schuko socket, 2 meters power cable

PFACO

1 presa schuko + 2 usb (A+C)
1 schuko power socket + 2 usb (A+C)

PFFAC

2 prese schuko + 2 usb (A+C)
2 schuko power socket + 2 usb (A+C)

PFF00

2 prese schuko
2 schuko power socket

FINITURE STRUTTURA
STRUCTURE FINISHES



RAL 9017
Metallo
Metal

FINITURE TAVOLINI
TABLES FINISHES



RAL 7024
Laminato HPL
HPL laminate

CERTIFICAZIONI CERTIFICATIONS

EN 16139 | EN 1022 | EN 1728 Testated by CATAS
Omologazione Ministeriale in Classe 11M